


ARCHITECTURAL STAIR TREADS & EDGING

SNLL

SOLUTIONS



DTAC DE0200B INSTALLATION

HOW CAN DTAC HELP?

DTAC are a vertically integrated business that designs, installs and maintains their products to the exacting codes and standards of the applicable regulatory body. We have a team of trained personnel all of whom are experienced in the requirements of the relevant standards and codes.

We can help:

Interpret and apply the relevant standards and codes applicable to your project

Design a solution to your project requirements

Manufacture and install products on site

If you have any questions in relation to the DTAC range, DTAC is ready and able to assist you in getting it right. Email a DTAC representative at solutions@dtac.com.au or for a friendly voice you can call 1300 793 478.

THE DTAC DIFFERENCE

When using DTAC products and services, you can be assured that:

- Products and solutions are designed to meet or even exceed certification and Australian and New Zealand Standards requirements
- ✓ Consultative support including layout and compliance services are provided throughout the life of the project including NCC interpretation
- ✓ DTAC manage the entire project from design and manufacturing to installation using our team of accredited professionals
- ✓ DTAC strive for excellence in design and craftsmanship but also back our products by warranty
- ✓ DTAC is part of the Raven Group of companies ensuring the highest quality products and services

DTAC STAIR TREADS & EDGING

DTAC's PEMKO® range of stair treads and edging have transformed the manner in which you can detail a stair edge, nosing or connection. Completely retro-fittable, the DTAC edging series provide a practical and aesthetically pleasing approach to prevention and protection.

With several designs and finishes available, our range of stair edging provides a flawless finish with compliant solutions to detailing a stair edge.

FEATURES & BENEFITS

Available in exclusive premium quality flat or angle profiles finished in hard anodised aluminium to suit all applications

Suitable for all stable finished surfaces and substrates

Designed to comply with AS 1428.1 Design for Access and Mobility Part 1: General Requirements for Access - New Building Work

Tested for compliance with luminance and slip resistance requirements

Backed by 2 year warranty



CONTENTS

ΠΤΔ

DESI	GNER STAIR EDGING	3
	CORDUROY	5
	PINSTRIPE	7
	PLEAT	11
	STITCH	13
	SUEDE	15
	URBAN	17
	RUGGED™	21
STAIF	R EDGING SYSTEMS FOR CARPET	23
	CORDUROY / PINSTRIPE	25
	PLEAT / STITCH	26
	SUEDE / URBAN	27

ST

DESIGNER STAIR EDGING

ILLIANS S.S. SETTING D (Contraction) 111 ---All states 40.000 ALC: NO of stand 1000 1000 5 ALCON . All sums

DTAC DE0210C STAIR EDGE SHOWN WITH DT0100 TGSI INSTALLATION

DTAC°

CORDUROY



R GF

DE0100C	Hard Natural Anodised (25µm)			
DE0100B	Hard Black Anodised (40µm)			
DE0100G	Gold Anodised (10µm)			
SIZE	W50 x T3 - 2500mm long			
FIXING	Adhesive			
TESTED AS 4586				
	AS 1428.1 V			
NCC COMP				

······

Application: Indoor or outdoor


12	DE0110C	Hard Natural Anodised (25µm)		
RIP	DE0110B	Hard Black Anodised (40µm)		
	DE0110G	Gold Anodised (10µr	n)	
	SIZE	H10 x W50 x T3 - 2500mm long		
	FIXING	Adhesive		
	TESTED	AS 4586		
		AS 1428.1	V	
	NCC COMF	LIANT		

Application: Indoor or outdoor


<u>AS 4586 APPENDIX A / B / C / D</u>


5 | DESIGNER EDGING

® PEMKO © DTAC Pty Ltd 2018




DE0130C	Hard Natural Anodised (25µm)	
DE0130B	Hard Black Anodised (40µm)	
SIZE	H30 x W30 x T3 - 2500mm long	
FIXING	Adhesive	
TESTED	AS 4586	
	AS 1428.1	





DE0120C	Hard Natural Anodised (25µm)				
DE0120B	Hard Black Anodised (40µm)				
SIZE H50 x W50 x T3 - 2500mm lon					
FIXING Adhesive					
TESTED	AS 4586	_			
	AS 1428.1 V				



AS 1428.1 APPENDIX B Design for Access & Mobility


www.dtac.com.au ® PEMKO

PINSTRIPE


DTAC[®]




DE0200B	Hard Black Anodised (40µm)		
SIZE	W50 x T3 - 2500mm long		
FIXING	Adhesive		
TESTED	AS 4586		
	AS 1428.1		



Application: Indoor




DE0220C	Hard Natural Anodised (25µm)	
DE0220B	Hard Black Anodised (40µm)	
SIZE	H30 x W30 x T3 - 2500mm long	
FIXING	Adhesive	
TESTED	AS 4586	
	AS 1428.1	






DE0210C	Hard Natural Anodised (25µm)			
DE0210B	Hard Black Anodised (40µm)			
SIZE	H10 x W50 x T3 - 2500mm long			
FIXING	Adhesive			
TESTED	AS 4586			
	AS 1428.1			
NCC COMF	PLIANT			



Application: Indoor



DE0230B	Hard Black Anodised (40µm)			
SIZE	H50 x W50 x T3 - 2500mm long			
FIXING	Adhesive			
TESTED AS 4586				
	AS 1428.1	- V		



Application: Indoor

AS	142	8.1	APPEN	DI)	КВ
Des	sign	for	Access	&	Mobility

® PEMKO

PINSTRIPE | 8

7 | DESIGNER EDGING

AS 4586 APPENDIX A / B / C / D

NATIONAL CONSTRUCTION CODE (NCC)

PINSTRIPE


DTAC[®]




DE0200BB	Black Brushed (40µ	m)
SIZE	W50 x T3 - 2500mm	long
FIXING	Adhesive	
TESTED	AS 4586	
	AS 1428.1	V




D	DE0220BB	Black Brushed (40µm)	
Ρ	SIZE	H30 x W30 x T3 - 2500mm long	
	FIXING	Adhesive	
	TESTED	AS 4586	
		AS 1428.1	V





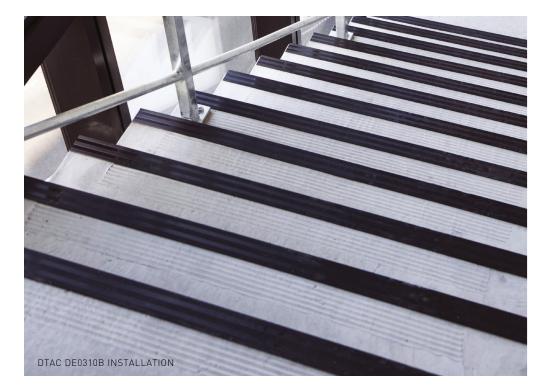




Application: Indoor



DE0210BB	Black Brushed (40µm)	
SIZE	H10 x W50 x T3 - 25	00mm long
FIXING	Adhesive	
TESTED	AS 4586	
	AS 1428.1	V



Application: Indoor

AS 4586 APPENDIX A / B / C / D

9 | DESIGNER EDGING


® PEMKO

AS 1428.1 APPENDIX B Design for Access & Mobility


© DTAC Pty Ltd 2018

www.dtac.com.au

PLEAT



DE0300B	Hard Black Anodised (40µm)	
SIZE	W50 x T3 - 2500mr	n long
FIXING	Adhesive	
TESTED	AS 4586	
	AS 1428.1	- V




Application: Indoor or Outdoor



DE0320C	Hard Natural Anodised (25µm)	
DE0320B	Hard Black Anodised (40µm)	
SIZE	H30 x W30 x T3 - 2500mm long	
FIXING	Adhesive	
TESTED	AS 4586	
	AS 1428.1	


DTAC[®]



Application: Indoor or Outdoor




DE0310C	Hard Natural Anodised (25µm)	
DE0310B	Hard Black Anodised (40µm)	
SIZE	H10 x W50 x T3 - 1	2500mm long
FIXING	Adhesive	
TESTED	AS 4586	
	AS 1428.1	- V
NCC COMF	LIANT	



Application: Indoor or Outdoor



DE0330C	Hard Natural Ano	dised (25µm)
SIZE	H50 x W50 x T3 - 2	2500mm long
FIXING	Adhesive	
TESTED	AS 4586	
	AS 1428.1	- V



Application: Indoor or Outdoor

AS 1428.1 APPENDIX B Design for Access & Mobility

® PEMKO

11 | DESIGNER EDGING

NATIONAL CONSTRUCTION CODE (NCC)

© DTAC Pty Ltd 2018 ® PEMKO

AS 4586 APPENDIX A / B / C / D


www.dtac.com.au

STITCH






DE0400C	Hard Natural Anodised (25µm)	
DE0400B	Hard Black Anodised (40µm)	
SIZE	W50 x T3 - 2500mm long	
FIXING	Adhesive	
TESTED	AS 4586	
	AS 1428.1	









DE0400BB	Black Brushed (40µm)	
SIZE	W50 x T3 - 2500mm	long
FIXING	Adhesive	
TESTED	AS 4586	
	AS 1428.1	V



Application: Indoor




DE0410C	Hard Natural Anodised (25µm)	
DE0410B	Hard Black Anodised (40µm)	
SIZE	H10 x W50 x T3 -	2500mm long
FIXING	Adhesive	
TESTED	AS 4586	
	AS 1428.1	- V
NCC COMP	LIANT	



Application: Indoor



DE0410BB	Black Brushed (40µm)	
SIZE	H10 x W50 x T3 - 2500mm long	
FIXING	Adhesive	
TESTED	AS 4586	
	AS 1428.1	



Application: Indoor

NATIONAL CONSTRUCTION CODE (NCC)	AS 4586 APPENDIX A / B / C / D		
13 designer edging	® PEMKO	© DTAC Pty Ltd 2018	


AS 1428.1	APPEN	אוכ	В
Design for			Mobility

www.dtac.com.au ® PEMKO

SUEDE




DE0500C	Hard Natural Anodised (25µm) Slip Resistent Insert	
DE0500B	Hard Black Anodised (40µm) Slip Resistent Insert	
SIZE	W55 x T3 - 2500mm long	
FIXING	Adhesive	
TESTED	AS 4586	
	AS 1428.1	
NCC COMF	PLIANT	



Application: Indoor

		R13 GRIP
	$\overline{\langle}$	


DE0510C	Hard Natural Anodised (25µm) Slip Resistent Insert		
DE0510B	Hard Black Anodised (40µm) Slip Resistent Insert		
SIZE	H10 x W55 x T3 - 2500mm long		
FIXING	Adhesive		
TESTED	AS 4586		
	AS 1428.1		
NCC COMPLIANT			



Application: Indoor

NATIONAL CONSTRUCTION CODE (NCC)	AS 4586 APPENDIX A / E	3 / C / D
15 designer edging	® PEMKO	© DTAC Pty Ltd 2018





Slip Resistent Insert

Slip Resistent Insert

Adhesive

AS 4586 AS 1428.1

Hard Natural Anodised (25µm)

Hard **Black** Anodised (40µm)

H50 x W55 x T3 - 2500mm long



ASI	42	o. I	АГГ	יור	V D
Desi					Mob

www.dtac.com.au ® PEMKO


Application: Indoor

URBAN



[





DE0680C	Hard Natural Anodised (25µm) Grey Silicon Carbide Infill	
DE0680B	Hard Black Anodised (40µm) Black Silicon Carbide Infill	
SIZE	H10 x W58 x T5 - 2500mm long	
FIXING	Screw-fixed. Optional adhesive (colour matched screws & plugs supplied)	
	· · · · · · · · · · · · · · · ·	
TESTED	· · · · · · · · · · · · · · · ·	
TESTED	plugs supplied)	

Application: **Outdoor** or Indoor

DE0690C	Hard Natural Anodised (25µm) Grey Silicon Carbide Infill	
DE0690B	Hard Black Anodised (40µm) Black Silicon Carbide Infill	
SIZE	W58 x T5 - 2500mm long	
FIXING	Screw-fixed. Optional adhesiv (colour matched screws & plugs supplied)	
TESTED		

AS/ISO 9239.1

NCC COMPLIANT


AS 4586 APPENDIX A / B / C / D


Application: **Outdoor** or Indoor

		R13 GRIP
		3.00

	DTAC°	
DE0700C	Hard Natural Anodised (25µm) Grey Silicon Carbide Infill	
DE0700B	Hard Black Anodised (40µm) Black Silicon Carbide Infill	
SIZE	H10 x W65 x T5 - 2500mm long	
FIXING	Screw-fixed. Optional adhesive (colour matched screws & plugs supplied)	
TESTED	AS 4586	
	AS 1428.1	
	AS/ISO 9239.1	

NCC COMPLIANT





P5 GRIP	DE070
	SIZE

DE0700CY	Hard Natural Anodised (25µm) Yellow Silicon Carbide Infill	
SIZE	H10 x W65 x T5 - 2500mm long	
FIXING	Screw-fixed. Optional adhesive (colour matched screws & plugs supplied)	
TESTED	AS 4586	
	AS 1428.1	
NCC COMPLIANT		

Application: **Outdoor** or Indoor

Application: Outdoor or Indoor

1428.1 APPENDIX B	AS/ISO 9239.1
sign for Access & Mobility	Reaction to Fire Tests for Floor Coverings

17 | DESIGNER EDGING


NATIONAL CONSTRUCTION CODE (NCC)

® PEMKO © DTAC Pty Ltd 2018

www.dtac.com.au ® PEMKO

AS Des


urban | 18



DE0710MF	Mill Finished Black Silicon Carbide Infill
SIZE	H35 x W75 x T5 - 3000mm long
FIXING	Screw-fixed. Optional adhesive (colour matched screws & plugs supplied)
TESTED	AS 4586
	AS 1428.1
	AS/ISO 9239.1
	Application: Outdoor or Indoor





DE0720MF	Mill Finished Black Silicon Carbide Infill
SIZE	H35 x W80 x T5 - 3000mm long
FIXING	Screw-fixed. Optional adhesive (colour matched screws & plugs supplied)
TESTED	AS 4586
	AS 1428.1
	AS/ISO 9239.1
	Application: Outdoor or Indoor



DE0730MF	Mill Finished Black Silicon Carbide Infill
SIZE	H35 x W95 x T5 - 3000mm long
FIXING	Screw-fixed. Optional adhesive (colour matched screws & plugs supplied)
TESTED	AS 4586
	AS 1428.1
	AS/ISO 9239.1
	Application: Outdoor or Indoor







Application: Outdoor or Indoor

Black Silicon Carbide Infill

plugs supplied)

AS 4586 AS 1428.1 AS/ISO 9239.1


DE0750MF Mill Finished

H35 x W135 x T5 - 3000mm long

Screw-fixed. Optional adhesive (colour matched screws &

Application: **Outdoor** or Indoor

	R12 GRIF
K	
Called Sent	



DE0760MF	Mill Finished Black Silicon Carbide Infill
DE0760MFY	Mill Finished Yellow Silicon Carbide Infill
SIZE	W50 x T5 - 3000mm long
FIXING	Screw-fixed. Optional adhesive (colour matched screws & plugs supplied)
TESTED	AS 4586
	AS 1428.1
	AS/ISO 9239.1
	Application, Outdoor or Indoor

Application: Outdoor or Indoor

AS 4586 APPENDIX A / B / C / D

19 | DESIGNER EDGING

AS 1428.1 APPENDIX B Design for Access & Mobility

© DTAC Pty Ltd 2018 ® PEMKO

® PEMKO www.dtac.com.au

AS/ISO 9239.1 Reaction to Fire Tests for Floor Coverings

RUGGED[™]

DTAC®


DTAC's new Rugged[™] Stair Edging range has high slip resistance and excellent durability. Suitable for fixing to open grate metal stairs and can be glue or screw fixed on concrete, timber and other substrates.


Manufactured from fibre glass reinforced polymer. Available in yellow and black, featuring 1500mm and 1800mm lengths.




DEF0010B	Black Fibre Glass Reinforced Polymer	
DEF0010Y	Yellow Fibre Glass Reinforced Polymer	
SIZE	H10 x W70 x T3 - 1500mm long	
DEF0020B	Black Fibre Glass Reinforced Polymer	
DEF0020Y	Yellow Fibre Glass Reinforced Polymer	
SIZE	H10 x W70 x T3 - 1800mm long	
FIXING	Screw-fixed onto metal stairs and gratings (fixings not supplied). Adhesive fix for all other substrates.	
TESTED	AS 4586	
	AS 1428.1	
NCC COMPLIANT		

Application: **Outdoor** or Indoor






NATIONAL CONSTRUCTION CODE (NCC)	AS 4586 APPENDIX A Wet Pendulum Test	
21 DESIGNER EDGING	® PEMKO	© DTAC Pty Ltd 2018

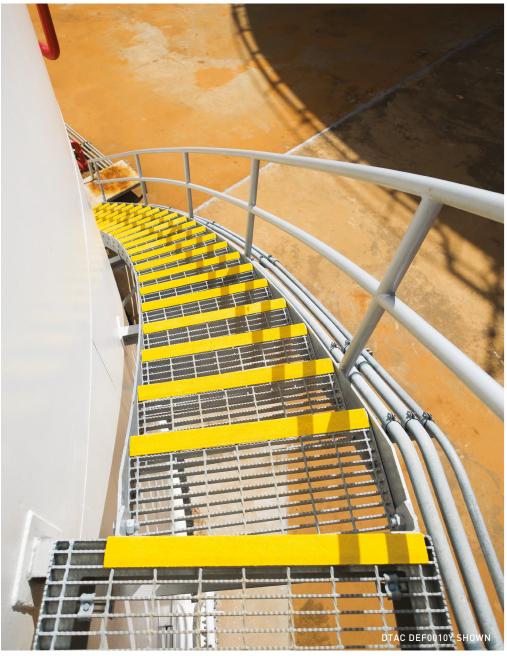

AS 1428.1 APPENDIX B Design for Access & Mobility

www.dtac.com.au ® PEMKO

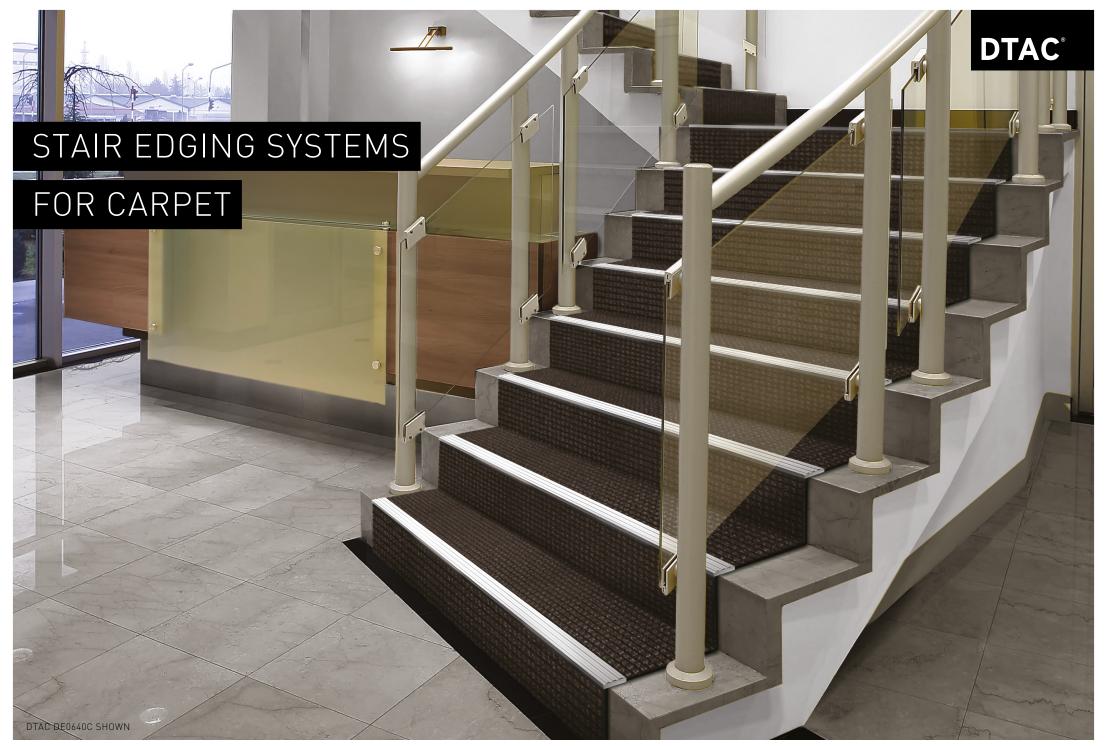


STAIR EDGING SYSTEMS FOR CARPET




PINSTRIPE
DTAC®





DE0630C Hard Natural Anodised (25µm)				
DE0630BHard Black Anodised (40μm)DE0630GGold Anodised (10μm)SIZEH10 x W50 x T3 - 2500mm lorFIXINGScrew-fixed or adhesive (screws & plugs supplied)				
		Accepts carpet thickness 6-10mm - carpet rebate 6.25mm		
		Escutcheon plates available for stairs with exposed ends		
		1		



NCC COMPLIANT

Registered Design Application: Indoor or outdoor

DE0640C Hard Natural Anodised (25µm)	
SIZE H10 x W50 x T3 - 2500mm lor	
FIXING Screw-fixed or adhesive (screws & plugs supplied)	
Accepts carpet thickness 6-10mm - carpet rebate 6.25mm	

Colour matched escutcheon plates available for stairs with exposed ends

TESTED AS 4586

AS 1428.1

NCC COMPLIANT

Registered Design Application: Indoor


	AS 4586	APPENDIX A /	B/C/D
--	---------	--------------	-------

25 | STAIR EDGING SYSTEMS FOR CARPET

NATIONAL CONSTRUCTION CODE (NCC)







STITCH



DE0650C	Hard Natural Anodised (25µm)
SIZE	H10 x W50 x T3 - 2500mm long
FIXING	Screw-fixed or adhesive (screws & plugs supplied)

DTAC[®]

Accepts carpet thickness 6-10mm - carpet rebate 6.25mm

Colour matched escutcheon plates available for stairs with exposed ends

	TESTED	AS 4586	
2		AS 1428.1	V
\supset			


NCC COMPLIANT

Registered Design Application: Indoor or Outdoor

DE0660C	Hard Natural Anodised (25µm)
SIZE	H10 x W50 x T3 - 2500mm long
FIXING	Screw-fixed or adhesive (screws & plugs supplied)
Accepts carpet thickness 6-10mm - carpet	

rebate 6.25mm

Colour matched escutcheon plates available for stairs with exposed ends




Registered Design Application: Indoor

AS 1428.1 APPENDIX B Design for Access & Mobility

www.dtac.com.au **®** PEMKO

STAIR EDGING SYSTEMS FOR CARPET



DTAC®	FIXING	Screv (screv
	Accepts ca rebate 6.2	
	Colour ma available f	
R13	TESTED	AS 45
GRIP		AS 14
	NCC COM	PLIANT
	Registered Application	0

	URBAN
0	TAC®
STAN S	
1	INC [®]
	R13 GRIP


~ ¬					
27	STAIR	EDGING	SYSTEMS	FOR	CARPET

DE0670C	Hard Natural Anodised (25µm) Slip Resistent Insert	
SIZE	H10 x W55 x T3 - 2500mm long	
FIXING	Screw-fixed or adhesive (screws & plugs supplied)	
Accepts carpet thickness 6-10mm - carpet rebate 6.25mm		
Colour matched escutcheon plates available for stairs with exposed ends		
TESTED	AS 4586	
	AS 1428.1	
NCC COMPLIANT		

n or

DE0780C	Hard Natural Anodised (25µm) Grey Silicon Carbide Infill	
DE0780B Hard Black Anodised (40µm) Black Silicon Carbide Infill		
SIZE H10 x W65 x T3 - 2500mm long		
FIXING Screw-fixed or adhesive (screws & plugs supplied)		
Accepts carpet thickness 6-10mm - carpet rebate 6.25mm		
Colour matched escutcheon plates available for stairs with exposed ends		





NCC COMPLIANT

Patent Pending, Registered Design Application: **Outdoor** or Indoor

® PEMKO © DTAC Pty Ltd 2018 AS 1428.1 APPENDIX B Design for Access & Mobility

AS/ISO 9239.1 Reaction to Fire Tests for Floor Coverings

www.dtac.com.au ® PEMKO STAIR EDGING SYSTEMS FOR CARPET | 28



DTAC[®]

DTAC®


DTAC STAIR TREADS AND EDGING FEATURE IN ICONIC PROJECTS ALL OVER AUSTRALIA. LISTED ARE JUST SOME OF THE INSTALLATIONS WHERE DTAC HAS BEEN THE BRAND OF CHOICE.

University of Canberra, Bruce, ACT 111 Elizabeth St, Sydney, NSW 220 Crown Street, Darlinghurst, NSW Mascot, Sydney, NSW Tabernacle Theatre, Darlinghurst, NSW Brisbane Town Hall, Brisbane, QLD Austin Hospital, Heidelberg, VIC Circus Oz, Collingwood, VIC Deakin University, Burwood, VIC DEPI Centre, Attwood, VIC Haileybury School, Brighton, VIC Hawthorn Arts Centre, Hawthorn, VIC NAB, Docklands, VIC The Goods Shed, Docklands, VIC

DTAC DE0700C SHOWN

ARCHITECTURAL FLOOR TACTILES,

STAIR TREADS & EDGING SOLUTIONS

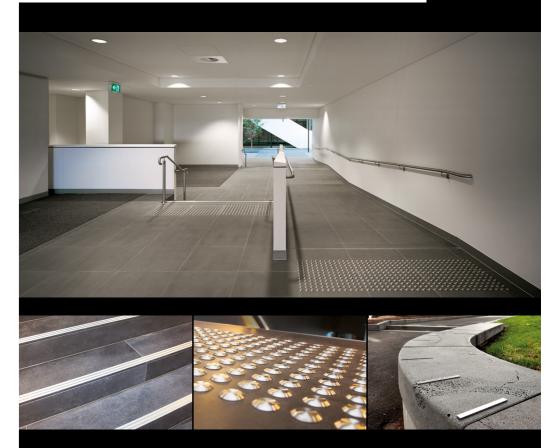

DTAC[®]

DTAC PTY LTD ABN 41 093 070 127

Unit 4, 11-12 Phillip Court Port Melbourne Victoria Australia 3207

PO Box 5059 South Melbourne Victoria Australia 3205 T 1300 793 478 F 1300 780 628

sales@dtac.com.au www.dtac.com.au

© DTAC Pty Ltd 2018

PEMKO® is a registered trademark of Raven Products Pty Ltd