


INTERGRATED TACTILE CLASSIC

STAINLESS STEEL (316)



| TYPE | Tactile | | |
|------------|----------------------------------|--|--|
| RANGE | Integrated Tactile | | |
| DESIGN | Classic | | |
| MATERIAL | 316 marine grade stainless steel | | |
| FINISH | Machined | | |
| DIMENSIONS | DIT0010 - H300 x W300 x T2mm | | |
| | DIT0020 - H300 x H600 x T2mm | | |
| | | | |

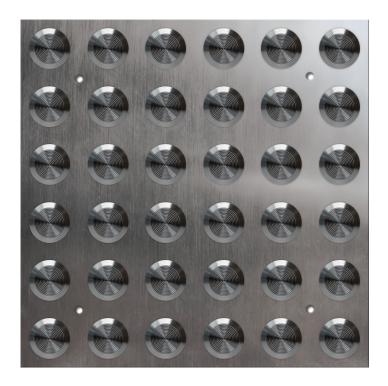

DTAC PTY LTD ABN 41 093 070 127

Unit 4, 11-12 Phillip Court Port Melbourne Victoria Australia 3207

PO Box 5059 South Melbourne Victoria Australia 3205 T 1300 793 478 F 1300 780 628

estimating@dtac.com.au www.dtac.com.au

© DTAC Pty Ltd 2016

FEATURES

Machined, concentric circle design on the horizontal face with a smooth outer edge

Tested for compliance with AS 1428.4

Tested for compliance with the NCC Section D clause 3.8 (TGSIs)

Tested for compliance with slip resistance requirements as detailed in HB 198

Backed by 2 year warranty

SLIP RESISTANCE TESTING

Important information: To determine a classification of a slip resistance rating, see Australian Standards Hand Book 198 (HB 198), an Introductory Guide to Slip Resistance of Pedestrian Materials. This document outlines the minimum ratings of a location and situation of a pedestrian surface.

| TEST | Wet Pendulum Test — AS 4586 APPENDIX A | | |
|-------------------|--|--|--|
| FOUR S 96 SLIDER | = 104 CLASS = P5 | | |
| TRL 55 SLIDER | = 79 CLASS = P5 | | |
| TEST | Wet/Barefoot Ramp Test — AS 4586 APPENDIX C | | |
| MEAN ANGLE OF INC | ELINATION = 27° CLASS = C | | |
| TEST | Oil/Wet Ramp Test — AS 4586 APPENDIX D | | |
| CORRECTED MEAN O | VERALL ACCEPTANCE ANGLE = 29° CLASS = R12 | | |

LUMINANCE TESTING

Important information: To determine a luminance contrast between a substrate and the DTAC TGSI node, see: AS 1428.4:2009. DTAC can test your substrate for luminance contrast to give you peace of mind that your DTAC project will be fully compliant to AS 1428.4.

| TEST | Design for Access & Mobility — AS 14 | 28.4 APPENDIX E |
|---------------|--------------------------------------|-----------------|
| LUMINANCE REF | LECTANCE RATING / WET | = 35.18 |
| LUMINANCE REF | LECTANCE RATING / DRY | = 38.45 |




INTEGRATED TACTILE CLASSIC INSTALLATION & APPLICATION

SUBSTRATE Vitrified Porcelain / Ceramics / Glass / Metals

CODE DIT0010

FIXING Drill and screw or direct stick

NOTE Installed on top of, or recessed into, any non drillable substrate that cannot be removed or are too fragile including undulating surfaces such as checker plate, escalator covers or uneven floors. Custom plate sizes available




CODE DIT0020

FIXING Drill and screw or direct stick

NOTE Installed on top of, or recessed into, any non drillable substrate that cannot be removed or are too fragile including undulating surfaces such as checker plate, escalator covers or uneven floors. Custom plate sizes available

SUBSTRATE Carpet / Carpet Tiles




CODE DIT0010

FIXING Drill and screw

NOTE Installed on top of, or recessed into, any existing carpet substrate that cannot be removed including steel access floors.

Custom plate sizes available



CODE DIT0020

 $\textbf{FIXING} \ \, \textbf{Drill and screw}$

OTE Installed on top of, or recessed into, any existing carpet substrate that cannot be removed including steel access floors.

Custom plate sizes available