


# EDGING STITCH HARD ANODISED ALUMINIUM



TYPE	Edging
RANGE	Designer Stair Edging
DESIGN	Stitch
MATERIAL	6063 T5 extruded aluminium alloy
FINISH	Hard anodised

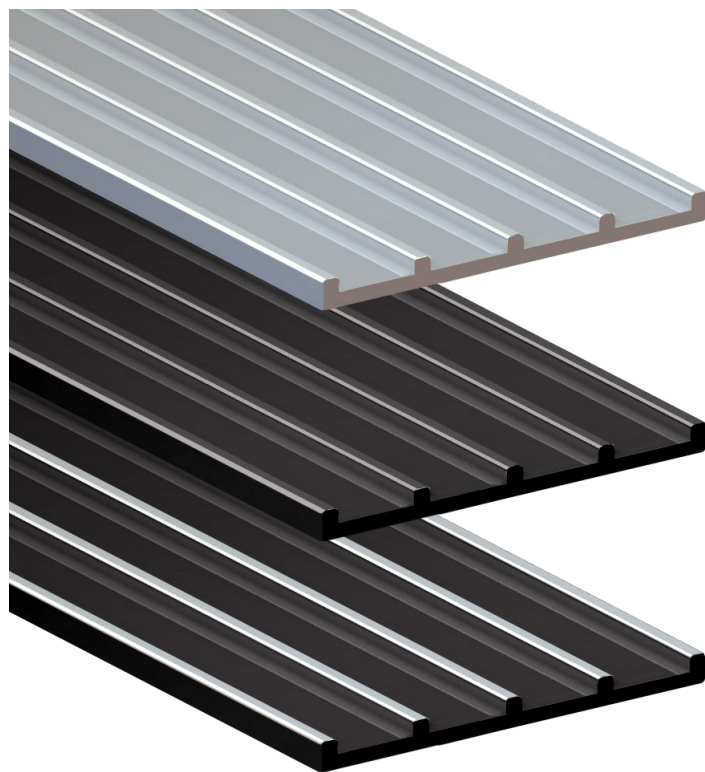

## FEATURES

Extruded continuous stitch pattern designed by DTAC in Australia

Available in exclusive premium quality flat, angle or carpet profiles

Suitable for all stable finished indoor surfaces and substrates

Designed to comply with AS 1428.1 Design for Access and Mobility Part 1: General Requirements for Access—New Building Work

Tested for compliance with slip resistance requirements as detailed in HB 198

Backed by 2 year warranty

## NCC COMPLIANT

National Construction Code (NCC) compliant products are designed to comply with the NCC—and Disability (Access to Premises—Buildings) Standards to meet the deemed-to-satisfy-provisions

## SLIP RESISTANCE TESTING

Important information: To determine a classification of a slip resistance rating, see Australian Standards Hand Book 198 (HB 198), an Introductory Guide to Slip Resistance of Pedestrian Materials. This document outlines the minimum ratings of a location and situation of a pedestrian surface.

TEST Wet Pendulum Test — AS 4586 APPENDIX A

FOUR S 96 SLIDER = 61 CLASS = P5

TRL 55 SLIDER = 56 CLASS = P5

TEST Dry Floor Friction Test — AS 4586 APPENDIX B

MEAN COF = 0.55 CLASS = D1

TEST Wet/Barefoot Ramp Test — AS 4586 APPENDIX C

MEAN ANGLE OF INCLINATION = 31° CLASS = C

TEST Oil/Wet Ramp Test — AS 4586 APPENDIX D

CORRECTED MEAN OVERALL ACCEPTANCE ANGLE = 13.1° CLASS = R10

## LUMINANCE TESTING

Important information: To determine a luminance contrast between a substrate and the DTAC EDGING, see: AS 1428.1:2009. DTAC can test your substrate for luminance contrast to give you peace of mind that your DTAC project will be fully compliant to AS 1428.1.

TEST Design for Access & Mobility — AS 1428.1 APPENDIX B

## NATURAL

LUMINANCE REFLECTANCE RATING / WET = 60.0

LUMINANCE REFLECTANCE RATING / DRY = 58.0

## BLACK

LUMINANCE REFLECTANCE RATING / WET = 5.1

LUMINANCE REFLECTANCE RATING / DRY = 5.7

DTAC PTY LTD  
ABN 41 093 070 127

Unit 4, 11-12 Phillip Court  
Port Melbourne Victoria  
Australia 3207

PO Box 5059  
South Melbourne Victoria  
Australia 3205

PEMKO®

T 1300 793 478  
F 1300 780 628


estimating@dtac.com.au  
www.dtac.com.au

© DTAC Pty Ltd 2018

# EDGING STITCH FINISHES & SIZES

## DESIGNER STAIR EDGING - AVAILABLE SIZES

### HARD NATURAL ANODISED



**CODE** DE0400C

**SIZE** W50 x T3 - L2500

**NCC COMPLIANT**

### HARD BLACK ANODISED



**CODE** DE0400B

**SIZE** W50 x T3 - L2500


**NCC COMPLIANT**

### BLACK BRUSHED



**CODE** DE0400BB

**SIZE** W50 x T3 - L2500



**CODE** DE0410C

**SIZE** H10 x W50 x T3 - L2500

**NCC COMPLIANT**



**CODE** DE0410B

**SIZE** H10 x W50 x T3 - L2500

**NCC COMPLIANT**



**CODE** DE0410BB

**SIZE** H10 x W50 x T3 - L2500

## AVAILABLE FINISHES


### HARD NATURAL ANODISED (25µm)




### HARD BLACK ANODISED (40µm)



### BLACK BRUSHED (40µm)

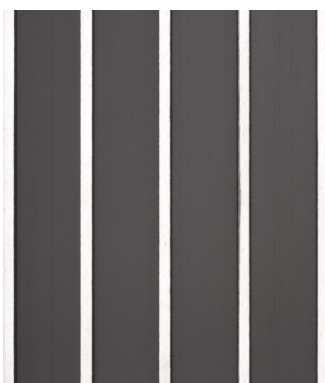

## STAIR EDGING SYSTEMS FOR CARPET - AVAILABLE SIZES

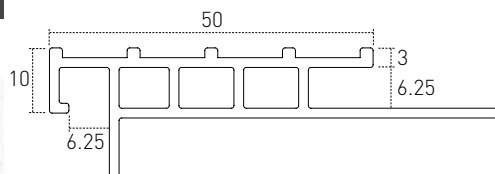

DTAC Registered Design


**CODE** DE0660C

**SIZE** H10 x W50 x T3 - L2500

Accepts carpet thickness of 6-10mm - carpet rebate 6.25mm

Colour matched escutcheon plates available for stairs with exposed ends

**NCC COMPLIANT**




Escutcheon Plate

**CODE** DESC01

**SIZE** H10 x W50 x T2.5


# EDGING STITCH INSTALLATION & APPLICATION

## SUBSTRATE Stone / Masonry / Timber / Vinyl



**FIXING** Adhesive


**NCC COMPLIANT**  
NATURAL & BLACK ONLY



**FIXING** Adhesive

**NCC COMPLIANT**  
NATURAL & BLACK ONLY


## SUBSTRATE Vitrified Porcelain / Ceramics / Glass / Metals



**FIXING** Adhesive

**NOTE** Ensure grout line is  
discrete as illustrated

**NCC COMPLIANT**  
NATURAL & BLACK ONLY




**FIXING** Adhesive

**NOTE** Ensure grout line is  
discrete as illustrated

**NCC COMPLIANT**  
NATURAL & BLACK ONLY

## SUBSTRATE Carpet / Carpet Tiles

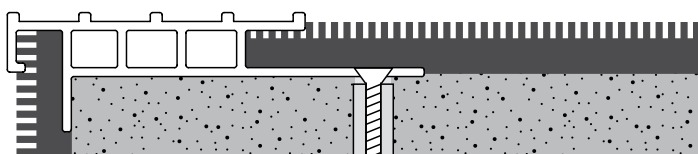

**FIXING** Screw-fixed or adhesive (screws and plugs supplied)

**NOTE** DTAC screw-fix mounting methods are available on request

**NCC COMPLIANT**