


ULTIMAT™ TACTILE CLASSIC IVORY URETHANE



TYPE	Warning Tactile
RANGE	Ultimat™ Tactile
DESIGN	Classic
MATERIAL	UV stabilised thermo plastic urethane (TPU)
FINISH	Injection moulded
DIMENSIONS	H300 x W300 x T2mm

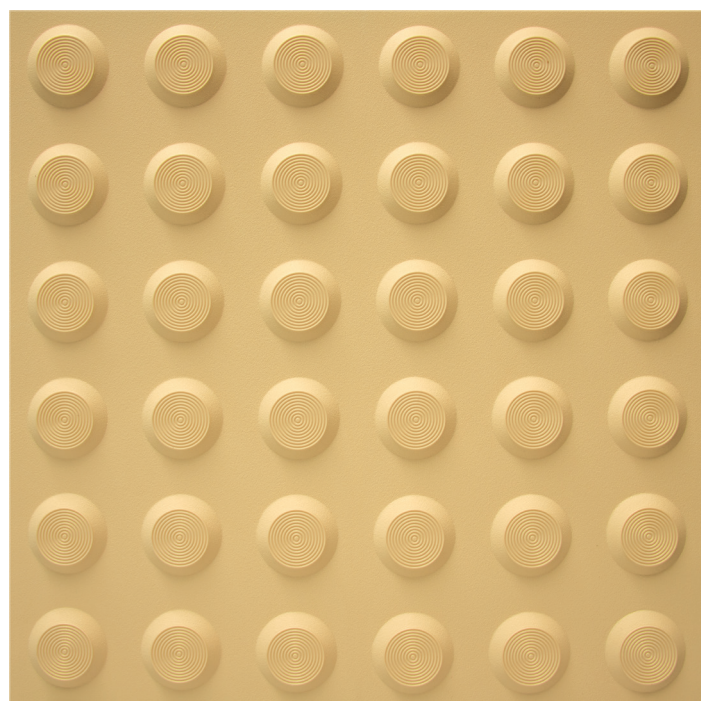

FEATURES

Injection moulded, concentric circle design on the horizontal face with a smooth outer edge

Tested for compliance with AS 1428.4

Tested for compliance with the NCC Section D clause 3.8 (TGSIs)

Tested for compliance with slip resistance requirements as detailed in HB 198

Backed by 2 year warranty

SLIP RESISTANCE TESTING

Important information: To determine a classification of a slip resistance rating, see Australian Standards Hand Book 198 (HB 198), an Introductory Guide to Slip Resistance of Pedestrian Materials. This document outlines the minimum ratings of a location and situation of a pedestrian surface.

TEST Wet Pendulum Test — AS 4586 APPENDIX A

FOUR S 96 SLIDER = 68 **CLASS** = P5

TRL 55 SLIDER = 73 **CLASS** = P5

TEST Wet/Barefoot Ramp Test — AS 4586 APPENDIX C

MEAN ANGLE OF INCLINATION = 23° **CLASS** = C

TEST Oil/Wet Ramp Test — AS 4586 APPENDIX D

CORRECTED MEAN OVERALL ACCEPTANCE ANGLE = 21° **CLASS** = R11

LUMINANCE TESTING

Important information: To determine a luminance contrast between a substrate and the DTAC TGSi node, see: AS 1428.4:2009. DTAC can test your substrate for luminance contrast to give you peace of mind that your DTAC project will be fully compliant to AS 1428.4.

TEST Design for Access & Mobility — AS 1428.4 APPENDIX E

LUMINANCE REFLECTANCE RATING / WET = 62.5

LUMINANCE REFLECTANCE RATING / DRY = 62.4

FIRE TESTING

Important information: The results displayed in this document relate to the behaviour and environment of the product in the conditions to which the test was carried out. This is not intended to be the sole criterion for assessing the potential fire hazard of the product in use.

TEST Reaction to Fire Tests for Floor Coverings — AS/ISO 9239.1

MEAN DISTANCE OF FLAME TRAVEL = 570mm

AVERAGE CRITICAL RADIANT FLUX = 3.0kW/m2

AVERAGE INTEGRATED SMOKE VALUE = 409% x min

DTAC PTY LTD
ABN 41 093 070 127

Unit 4, 11-12 Phillip Court
Port Melbourne Victoria
Australia 3207

PO Box 5059
South Melbourne Victoria
Australia 3205


T 1300 793 478
F 1300 780 628

estimating@dtac.com.au
www.dtac.com.au

© DTAC Pty Ltd 2016

ULTIMAT™ TACTILE CLASSIC IVORY APPLICATION

SUBSTRATE Vitrified Porcelain / Ceramics / Glass / Metals

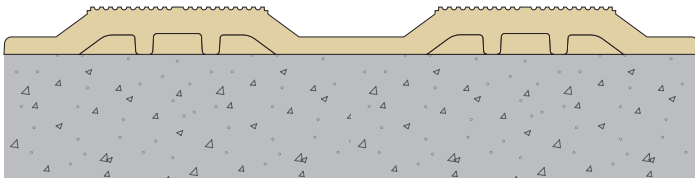


CODE DWU0013

FIXING Direct stick with DTAC Anchor Adhesive

NOTE Installed on top of or installed in an existing recess made to suit the multiples of the 300 x 300mm tile.

SUBSTRATE Carpet / Carpet Tiles

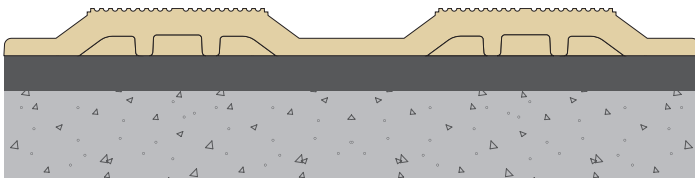

CODE DWU0013

FIXING Direct stick with DTAC Anchor Adhesive

NOTE Installed on top of or installed in an existing recess made to suit the multiples of the 300 x 300mm tile.