

Music School, Clichy, France

Description of the project

Strip decoupling of the building foundation, reduction of secondary airborne noise and vertical shock decoupling

Load range

0.25 – 1.5 N/mm²

Material

Regupol® MF, Regupol® XHT, Regupol® HT

Requirements


Natural frequency 10 Hz

Quantity

approx. 1,700 m²



Additional references are listed on our website.

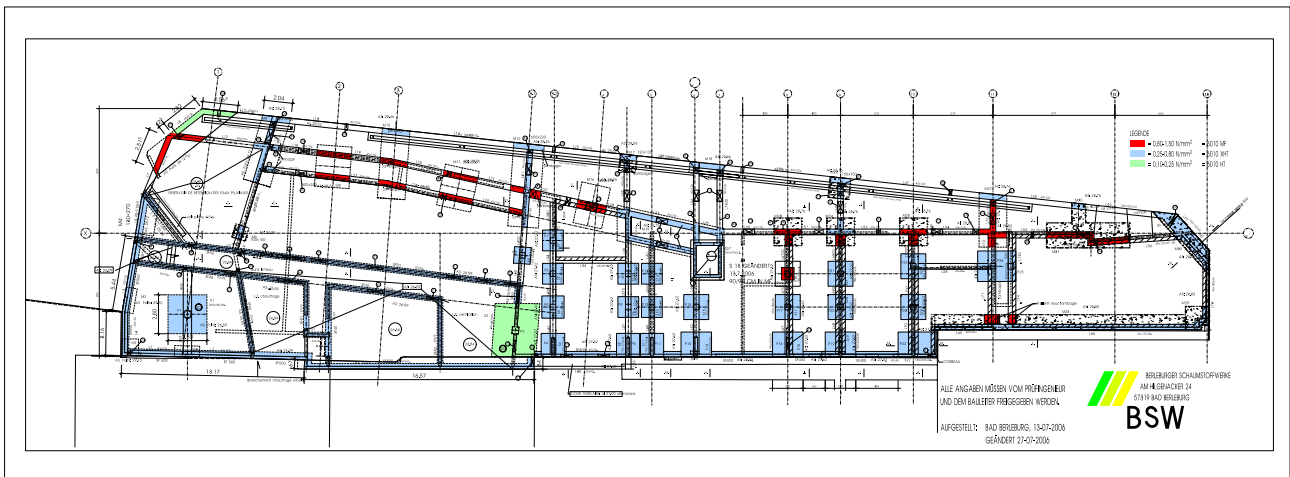

Red: **Regupol® MF**, green: **Regupol® XHT**, blue: **Regupol® HT**

Contact: Regupol (Australia) Pty. Ltd., Phone: (02) 9820 1233 • vibration@regupol.com.au • www.regupol-vibration-technology.com.au

