


EDGING CORDUROY HARD ANODISED ALUMINIUM



TYPE	Edging
RANGE	Designer Stair Edging
DESIGN	Corduroy
MATERIAL	6063 T5 extruded aluminium alloy
FINISH	Hard anodised

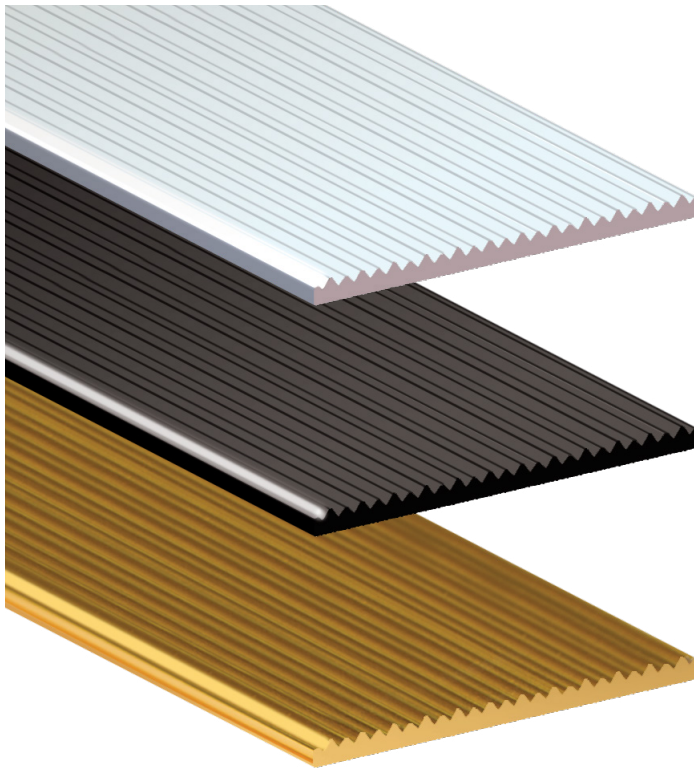

FEATURES

- Extruded continuous corduroy pattern designed by DTAC in Australia
- Available in exclusive premium quality flat, angle or carpet profiles
- Suitable for all stable finished indoor or outdoor surfaces and substrates (DE0100, DE0110 & DE0630 only)
- Designed to comply with AS 1428.1 Design for Access and Mobility Part 1: General Requirements for Access — New Building Work
- Tested for compliance with slip resistance requirements as detailed in HB 198
- Backed by 2 year warranty

NCC COMPLIANT

National Construction Code (NCC) compliant products are designed to comply with the NCC—and Disability (Access to Premises—Buildings) Standards to meet the deemed-to-satisfy-provisions

SLIP RESISTANCE TESTING

Important information: To determine a classification of a slip resistance rating, see Australian Standards Hand Book 198 (HB 198), an Introductory Guide to Slip Resistance of Pedestrian Materials. This document outlines the minimum ratings of a location and situation of a pedestrian surface.

TEST	Wet Pendulum Test — AS 4586 APPENDIX A
FOUR S 96 SLIDER	= 63 CLASS = P5
TRL 55 SLIDER	= 66 CLASS = P5
TEST	Dry Floor Friction Test — AS 4586 APPENDIX B
MEAN COF	= 0.55 CLASS = D1
TEST	Wet/Barefoot Ramp Test — AS 4586 APPENDIX C
MEAN ANGLE OF INCLINATION	= 33° CLASS = C
TEST	Oil/Wet Ramp Test — AS 4586 APPENDIX D
CORRECTED MEAN OVERALL ACCEPTANCE ANGLE	= 31.7° CLASS = R12

LUMINANCE TESTING

Important information: To determine a luminance contrast between a substrate and the DTAC EDGING, see: AS 1428.1:2009. DTAC can test your substrate for luminance contrast to give you peace of mind that your DTAC project will be fully compliant to AS 1428.1.

TEST	Design for Access & Mobility — AS 1428.1 APPENDIX B
NATURAL	
LUMINANCE REFLECTANCE RATING / WET	= 42.3
LUMINANCE REFLECTANCE RATING / DRY	= 41.4
BLACK	
LUMINANCE REFLECTANCE RATING / WET	= 2.8
LUMINANCE REFLECTANCE RATING / DRY	= 3.4
GOLD	
LUMINANCE REFLECTANCE RATING / WET	= 41.9
LUMINANCE REFLECTANCE RATING / DRY	= 44.5

DTAC PTY LTD
ABN 41 093 070 127

PEMKO®

Unit 4, 11-12 Phillip Court
Port Melbourne Victoria
Australia 3207

T 1300 793 478
F 1300 780 628

PO Box 5059
South Melbourne Victoria
Australia 3205


estimating@dtac.com.au
www.dtac.com.au

© DTAC Pty Ltd 2018

EDGING CORDUROY FINISHES & SIZES

DESIGNER STAIR EDGING - AVAILABLE SIZES


HARD NATURAL ANODISED



CODE DE0100C
SIZE W50 x T3 - L2500

NCC COMPLIANT


HARD BLACK ANODISED



CODE DE0100B
SIZE W50 x T3 - L2500

NCC COMPLIANT

GOLD ANODISED



CODE DE0100G
SIZE W50 x T3 - L2500

NCC COMPLIANT

AVAILABLE FINISHES



HARD NATURAL ANODISED (25µm)



HARD BLACK ANODISED (40µm)



GOLD ANODISED (10µm)

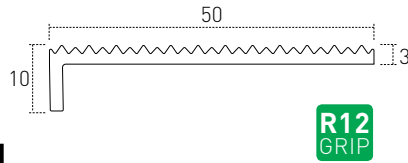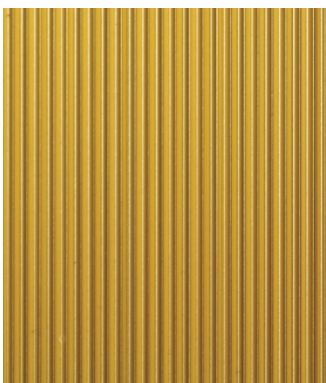


CODE DE0110C
SIZE H10 x W50 x T3 - L2500

NCC COMPLIANT




CODE DE0110B
SIZE H10 x W50 x T3 - L2500

NCC COMPLIANT



CODE DE0110G
SIZE H10 x W50 x T3 - L2500

NCC COMPLIANT

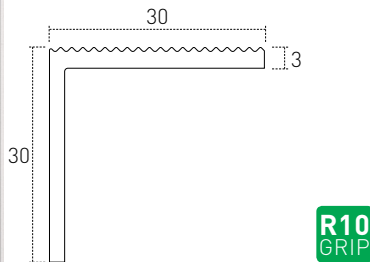


CODE DE0130C
SIZE H30 x W30 x T3 - L2500

NCC COMPLIANT




CODE DE0130B
SIZE H30 x W30 x T3 - L2500

NCC COMPLIANT

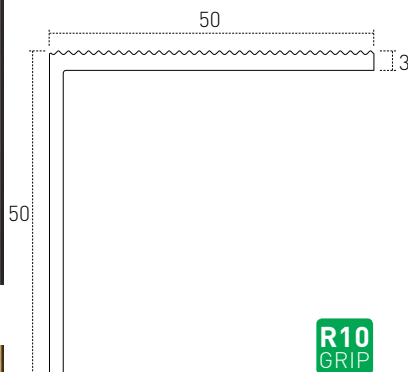

CODE DE0120C
SIZE H50 x W50 x T3 - L2500

NCC COMPLIANT




CODE DE0120B
SIZE H50 x W50 x T3 - L2500

NCC COMPLIANT

EDGING CORDUROY FINISHES & SIZES

STAIR EDGING SYSTEMS FOR CARPET

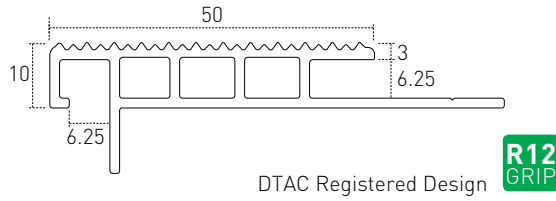


CODE DE0630C

SIZE H10 x W50 x T3 - L2500

Accepts carpet thickness of 6-10mm - carpet rebate 6.25mm

Colour matched escutcheon plates available for stairs with exposed ends

NCC COMPLIANT




Escutcheon Plate

CODE DESC01

SIZE H10 x W50 x T2.5

AVAILABLE FINISHES

HARD NATURAL ANODISED (25µm)

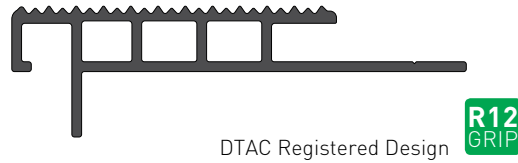

CODE DE0630B


SIZE H10 x W50 x T3 - L2500

Accepts carpet thickness of 6-10mm - carpet rebate 6.25mm

Escutcheon plates available for stairs with exposed ends

NCC COMPLIANT

HARD BLACK ANODISED (40µm)

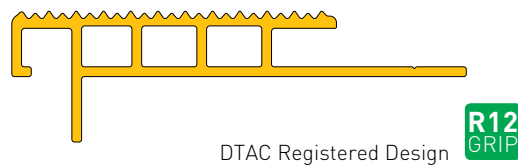

CODE DE0630G


SIZE H10 x W50 x T3 - L2500

Accepts carpet thickness of 6-10mm - carpet rebate 6.25mm

Escutcheon plates available for stairs with exposed ends


NCC COMPLIANT

GOLD ANODISED (10µm)

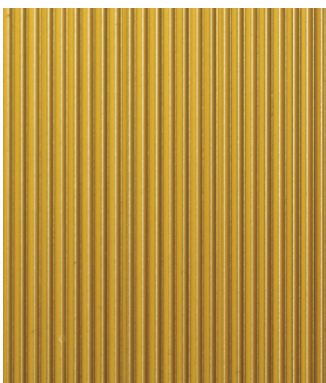


EDGING CORDUROY INSTALLATION & APPLICATION

SUBSTRATE Stone / Masonry / Timber / Vinyl




FIXING Adhesive

NCC COMPLIANT




FIXING Adhesive

NCC COMPLIANT




FIXING Adhesive



FIXING Adhesive


SUBSTRATE Vitrified Porcelain / Ceramics / Glass / Metals



FIXING Adhesive

NOTE Ensure grout line is discrete as illustrated


NCC COMPLIANT




FIXING Adhesive

NOTE Ensure grout line is discrete as illustrated

NCC COMPLIANT




FIXING Adhesive



FIXING Adhesive

SUBSTRATE Carpet / Carpet Tiles

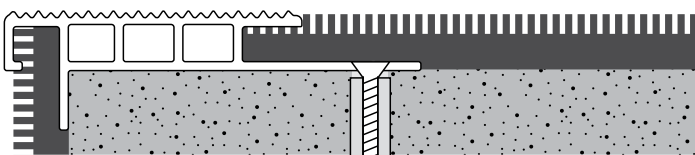

FIXING Screw-fixed or adhesive (screws and plugs supplied)

NOTE DTAC screw-fix mounting methods are available on request

NCC COMPLIANT