


EDGING PINSTRIPE HARD ANODISED ALUMINIUM



TYPE	Edging
RANGE	Designer Stair Edging
DESIGN	Pinstripe
MATERIAL	6063 T5 extruded aluminium alloy
FINISH	Hard anodised

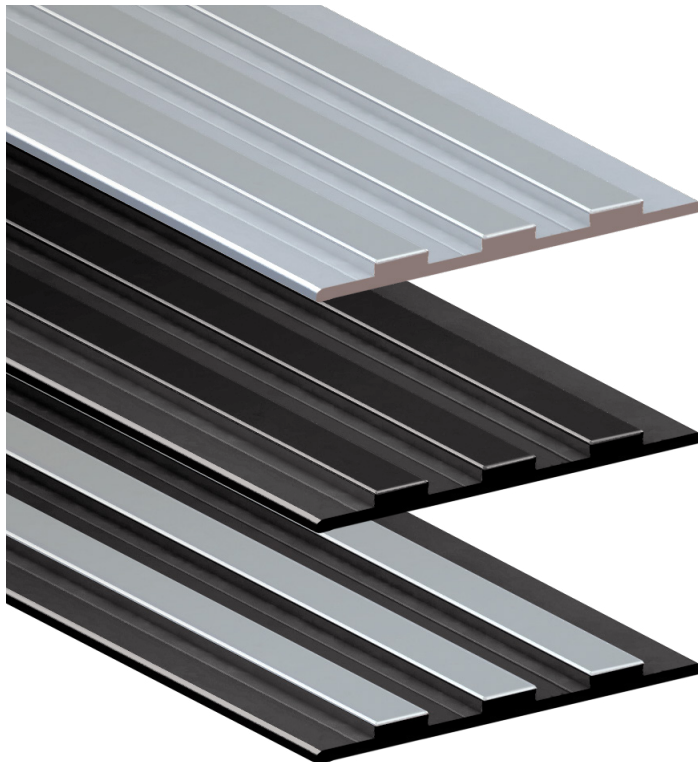

FEATURES

Extruded intermittent high and low, smooth blunt edge plates designed by DTAC in Australia

Available in exclusive premium quality flat, angle or carpet profiles

Suitable for all stable finished indoor surfaces and substrates

Designed to comply with AS 1428.1 Design for Access and Mobility Part 1: General Requirements for Access — New Building Work

Tested for compliance with slip resistance requirements as detailed in HB 198

Backed by 2 year warranty

NCC COMPLIANT

National Construction Code (NCC) compliant products are designed to comply with the NCC—and Disability (Access to Premises—Buildings) Standards to meet the deemed-to-satisfy-provisions

SLIP RESISTANCE TESTING

Important information: To determine a classification of a slip resistance rating, see Australian Standards Hand Book 198 (HB 198), an Introductory Guide to Slip Resistance of Pedestrian Materials. This document outlines the minimum ratings of a location and situation of a pedestrian surface.

TEST Wet Pendulum Test — AS 4586 APPENDIX A

FOUR S 96 SLIDER = 54 **CLASS** = P4

TRL 55 SLIDER = 51 **CLASS** = P4

TEST Dry Floor Friction Test — AS 4586 APPENDIX B

MEAN COF = 0.55 **CLASS** = D1

TEST Wet/Barefoot Ramp Test — AS 4586 APPENDIX C

MEAN ANGLE OF INCLINATION = 31° **CLASS** = C

TEST Oil/Wet Ramp Test — AS 4586 APPENDIX D

CORRECTED MEAN OVERALL ACCEPTANCE ANGLE = 11.6° **CLASS** = R10

LUMINANCE TESTING

Important information: To determine a luminance contrast between a substrate and the DTAC EDGING, see: AS 1428.1:2009. DTAC can test your substrate for luminance contrast to give you peace of mind that your DTAC project will be fully compliant to AS 1428.1.

TEST Design for Access & Mobility — AS 1428.1 APPENDIX B

NATURAL

LUMINANCE REFLECTANCE RATING / WET = 64.6

LUMINANCE REFLECTANCE RATING / DRY = 63.7

BLACK

LUMINANCE REFLECTANCE RATING / WET = 5.0

LUMINANCE REFLECTANCE RATING / DRY = 5.8

DTAC PTY LTD
ABN 41 093 070 127

PEMKO®

Unit 4, 11-12 Phillip Court
Port Melbourne Victoria
Australia 3207

T 1300 793 478
F 1300 780 628

PO Box 5059
South Melbourne Victoria
Australia 3205


estimating@dtac.com.au
www.dtac.com.au

© DTAC Pty Ltd 2018

EDGING PINSTRIPE FINISHES & SIZES

DESIGNER STAIR EDGING - AVAILABLE SIZES

HARD NATURAL ANODISED



CODE DE0200C
SIZE W50 x T3 - L2500

NCC COMPLIANT

HARD BLACK ANODISED




CODE DE0200B
SIZE W50 x T3 - L2500

NCC COMPLIANT

BLACK BRUSHED



CODE DE0200BB
SIZE W50 x T3 - L2500



CODE DE0210C
SIZE H10 x W50 x T3 - L2500

NCC COMPLIANT



CODE DE0210B
SIZE H10 x W50 x T3 - L2500

NCC COMPLIANT



CODE DE0210BB
SIZE H10 x W50 x T3 - L2500

AVAILABLE FINISHES


HARD NATURAL ANODISED (25µm)




HARD BLACK ANODISED (40µm)




BLACK BRUSHED (40µm)




CODE DE0220C
SIZE H30 x W30 x T3 - L2500



CODE DE0220B
SIZE H30 x W30 x T3 - L2500




CODE DE0220BB
SIZE H30 x W30 x T3 - L2500

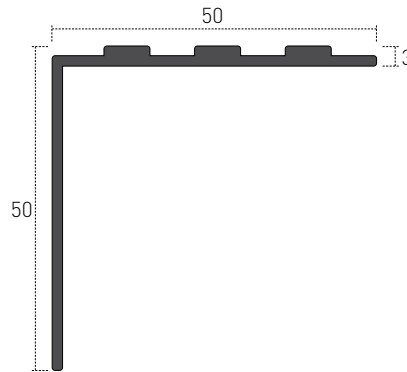

CODE DE0230B
SIZE H50 x W50 x T3 - L2500

STAIR EDGING SYSTEMS FOR CARPET - AVAILABLE SIZES

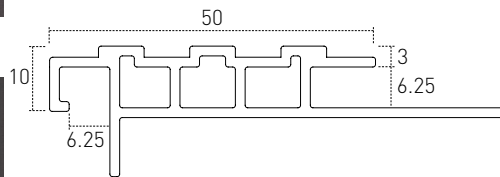


DTAC Registered Design

CODE DE0640C
SIZE H10 x W50 x T3 - L2500

Accepts carpet thickness of 6-10mm - carpet rebate 6.25mm

Colour matched escutcheon plates available for stairs with exposed ends

NCC COMPLIANT




Escutcheon Plate

CODE DESC01

SIZE H10 x W50 x T2.5


EDGING PINSTRIPE INSTALLATION & APPLICATION

SUBSTRATE Stone / Masonry / Timber / Vinyl




FIXING Adhesive

NCC COMPLIANT
NATURAL & BLACK ONLY




FIXING Adhesive

NCC COMPLIANT
NATURAL & BLACK ONLY




FIXING Adhesive

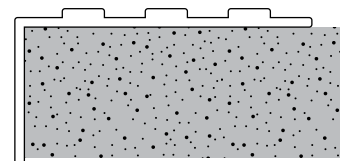

FIXING Adhesive


SUBSTRATE Vitrified Porcelain / Ceramics / Glass / Metals



FIXING Adhesive

NOTE Ensure grout line is discrete as illustrated


NCC COMPLIANT
NATURAL & BLACK ONLY




FIXING Adhesive

NOTE Ensure grout line is discrete as illustrated

NCC COMPLIANT
NATURAL & BLACK ONLY




FIXING Adhesive

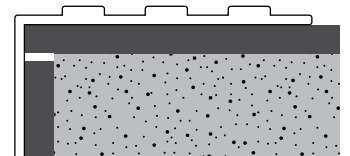

FIXING Adhesive

SUBSTRATE Carpet / Carpet Tiles

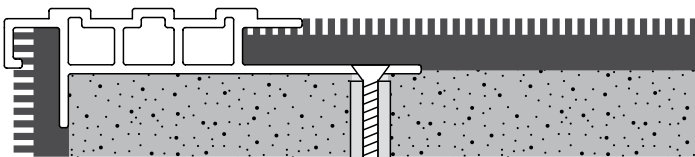

FIXING Screw-fixed or adhesive (screws and plugs supplied)

NOTE DTAC screw-fix mounting methods are available on request

NCC COMPLIANT